






Paslode®

CNP65.1



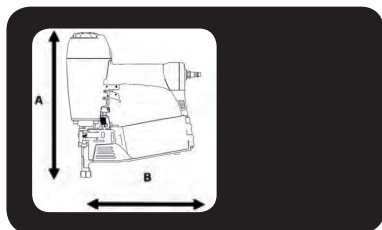

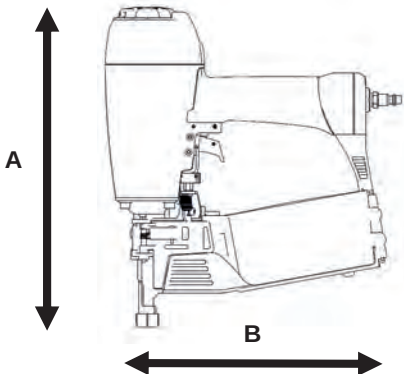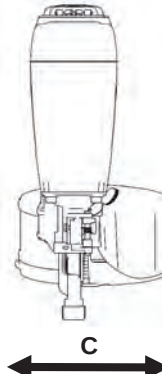		A = 320 mm B = 310 mm C = 160 mm
		 = 2,2 kg

1,7l (6 bar) /
Ps max. = 8,3 bar

EN 12549+EN ISO 4871 EN12096 : 1997 ISO 8662-11	L_{WA.1s} = 89 dBA L_{pA.1s} = 86 dBA L_{pA.1s1m} = 76 dBA	
	Vibration	= 2,8 m/s²

325 x		
Paslode 0° Coil Nails	Paslode IN-tape	D max. = 5,8 mm L = 35-65 mm d = 2,1-3,0 mm



+



=




	Sequential trigger actuation/ Einzelauslösung/ enkelschots/ Déclenchement du tir - mode séquentiel/ Funcionamiento secuencial "en continuo"/ Gatilho de actuação sequencial/ funzionamento sequenziale (colpo a colpo)/ Enkeltskuds aftrækker/ Enkelskott/ Enkeltskudds avtrekker/ Kertalaukaisu/ Üksiklasu meetodil töötamine/ Uruchomienie spustu sekwencyjne/ Sekvenční spoušť/ Egyes lövés (szakaszosan működtetett elsütő billentyűvel)/ Posamezno proženje/ Kontaktirajte singl / Последовательная активация при нажатии на курок/ Sekvenčná aktivácia spúšte/ التشغيل بالزر التسلسلي المقيد / Nuoseklusis paleidimo mechanizmas/ Sekvenciālās palaides iedarbināšana Raðkveikjuvirkjun
	Contact trigger actuation/ Kontaktauslösung/ repeterend schieten/ Déclenchement du tir - mode rafale/ Funcionamiento por contacto "clavo a clavo"/ Gatilho de actuação por contacto/ funcionamento a contacto/ Stødskydnings aftrækker/ Støtskjutning/ Støtspikrings avtrekker/ Kosketuslaukaisu/ Automaatmeetodil töötamine/ Uruchomienie spustu przez kontakt/ Kontaktní spoušť/ Sorozatlövés (folyamatosan behűtött elsütő billentyűvel)/ Kontaktno proženje/ Kontaktirajte pokretanje/ Контактная активация при нажатии на курок/ Kontaktná aktivácia spúšte/ التشغيل بتلامس الزر / Kontaktinis paleidimo mechanizmas/ Kontakta palaides iedarbināšana/ Snertikveikjuvirkjun




Model: CNP65.1 No. 505706 	Model: CNP65.1 No. 505707 
CNP65.1 PNEUMATIC COIL NAILER Code: 505706 Trigger actuation: Sequential Paslode® (Paslode GmbH) Gartenweg 10 • D-70569 Heimsheim, Germany Ø Coil  IN-TAPE  Ø max 5,2 mm  Ø max 10 mm  Ø max 12 mm  Ø max 14 mm  Ø max 16 mm  Ø max 18 mm  Ø max 20 mm  Ø max 22 mm  Ø max 24 mm  Ø max 26 mm  Ø max 28 mm  Ø max 30 mm  Ø max 32 mm  Ø max 34 mm  Ø max 36 mm  Ø max 38 mm  Ø max 40 mm  Ø max 42 mm  Ø max 44 mm  Ø max 46 mm  Ø max 48 mm  Ø max 50 mm  Ø max 52 mm  Ø max 54 mm  Ø max 56 mm  Ø max 58 mm  Ø max 60 mm  Ø max 62 mm  Ø max 64 mm  Ø max 66 mm  Ø max 68 mm Ø max 70 mm Ø max 72 mm Ø max 74 mm Ø max 76 mm Ø max 78 mm Ø max 80 mm Ø max 82 mm Ø max 84 mm Ø max 86 mm Ø max 88 mm Ø max 90 mm Ø max 92 mm Ø max 94 mm Ø max 96 mm Ø max 98 mm Ø max 100 mm Ø max 102 mm Ø max 104 mm Ø max 106 mm Ø max 108 mm Ø max 110 mm Ø max 112 mm Ø max 114 mm Ø max 116 mm Ø max 118 mm Ø max 120 mm Ø max 122 mm Ø max 124 mm Ø max 126 mm Ø max 128 mm Ø max 130 mm Ø max 132 mm Ø max 134 mm Ø max 136 mm Ø max 138 mm Ø max 140 mm Ø max 142 mm Ø max 144 mm Ø max 146 mm Ø max 148 mm Ø max 150 mm Ø max 152 mm Ø max 154 mm Ø max 156 mm Ø max 158 mm Ø max 160 mm Ø max 162 mm Ø max 164 mm Ø max 166 mm Ø max 168 mm Ø max 170 mm Ø max 172 mm Ø max 174 mm Ø max 176 mm Ø max 178 mm Ø max 180 mm Ø max 182 mm Ø max 184 mm Ø max 186 mm Ø max 188 mm Ø max 190 mm Ø max 192 mm Ø max 194 mm Ø max 196 mm Ø max 198 mm Ø max 200 mm Ø max 202 mm Ø max 204 mm Ø max 206 mm Ø max 208 mm Ø max 210 mm Ø max 212 mm Ø max 214 mm Ø max 216 mm Ø max 218 mm Ø max 220 mm Ø max 222 mm Ø max 224 mm Ø max 226 mm Ø max 228 mm Ø max 230 mm Ø max 232 mm Ø max 234 mm Ø max 236 mm Ø max 238 mm Ø max 240 mm Ø max 242 mm Ø max 244 mm Ø max 246 mm Ø max 248 mm Ø max 250 mm Ø max 252 mm Ø max 254 mm Ø max 256 mm Ø max 258 mm Ø max 260 mm Ø max 262 mm Ø max 264 mm Ø max 266 mm Ø max 268 mm Ø max 270 mm Ø max 272 mm Ø max 274 mm Ø max 276 mm Ø max 278 mm Ø max 280 mm Ø max 282 mm Ø max 284 mm Ø max 286 mm Ø max 288 mm Ø max 290 mm Ø max 292 mm Ø max 294 mm Ø max 296 mm Ø max 298 mm Ø max 300 mm Ø max 302 mm Ø max 304 mm Ø max 306 mm Ø max 308 mm Ø max 310 mm Ø max 312 mm Ø max 314 mm Ø max 316 mm Ø max 318 mm Ø max 320 mm Ø max 322 mm Ø max 324 mm Ø max 326 mm Ø max 328 mm Ø max 330 mm Ø max 332 mm Ø max 334 mm Ø max 336 mm Ø max 338 mm Ø max 340 mm Ø max 342 mm Ø max 344 mm Ø max 346 mm Ø max 348 mm Ø max 350 mm Ø max 352 mm Ø max 354 mm Ø max 356 mm Ø max 358 mm Ø max 360 mm Ø max 362 mm Ø max 364 mm Ø max 366 mm Ø max 368 mm Ø max 370 mm Ø max 372 mm Ø max 374 mm Ø max 376 mm Ø max 378 mm Ø max 380 mm Ø max 382 mm Ø max 384 mm Ø max 386 mm Ø max 388 mm Ø max 390 mm Ø max 392 mm Ø max 394 mm Ø max 396 mm Ø max 398 mm Ø max 400 mm Ø max 402 mm Ø max 404 mm Ø max 406 mm Ø max 408 mm Ø max 410 mm Ø max 412 mm Ø max 414 mm Ø max 416 mm Ø max 418 mm Ø max 420 mm Ø max 422 mm Ø max 424 mm Ø max 426 mm Ø max 428 mm Ø max 430 mm Ø max 432 mm Ø max 434 mm Ø max 436 mm Ø max 438 mm Ø max 440 mm Ø max 442 mm Ø max 444 mm Ø max 446 mm Ø max 448 mm Ø max 450 mm Ø max 452 mm Ø max 454 mm Ø max 456 mm Ø max 458 mm Ø max 460 mm Ø max 462 mm Ø max 464 mm Ø max 466 mm Ø max 468 mm Ø max 470 mm Ø max 472 mm Ø max 474 mm Ø max 476 mm Ø max 478 mm Ø max 480 mm Ø max 482 mm Ø max 484 mm Ø max 486 mm Ø max 488 mm Ø max 490 mm Ø max 492 mm Ø max 494 mm Ø max 496 mm Ø max 498 mm Ø max 500 mm Ø max 502 mm Ø max 504 mm Ø max 506 mm Ø max 508 mm Ø max 510 mm Ø max 512 mm Ø max 514 mm Ø max 516 mm Ø max 518 mm Ø max 520 mm Ø max 522 mm Ø max 524 mm Ø max 526 mm Ø max 528 mm Ø max 530 mm Ø max 532 mm Ø max 534 mm Ø max 536 mm	

Accessories

		
No. 576487 Hanger	No. 505203 Magazine insert	No. 151299 / No. 576216 0,5 l oil / 1 l oil


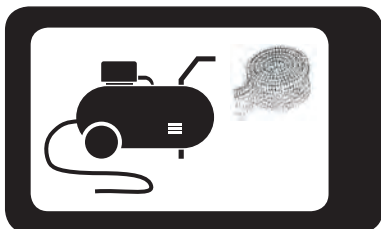




014 748

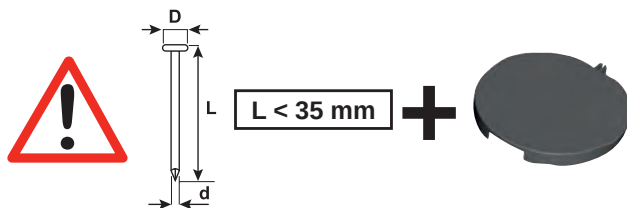
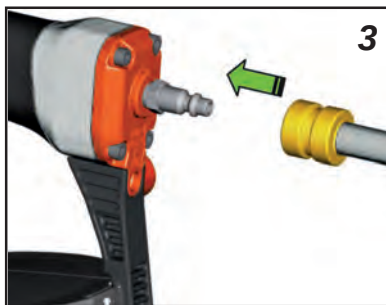





014 748

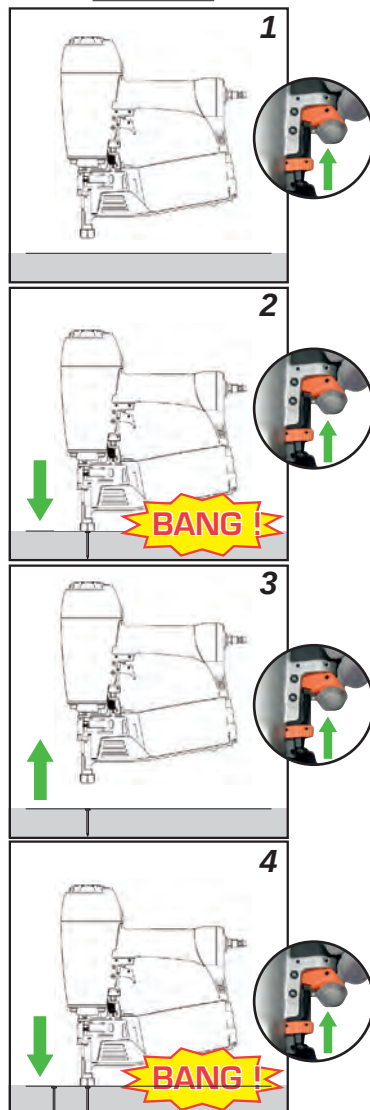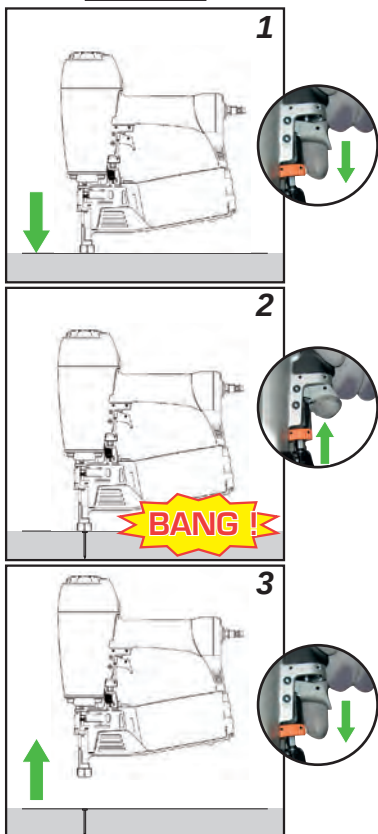

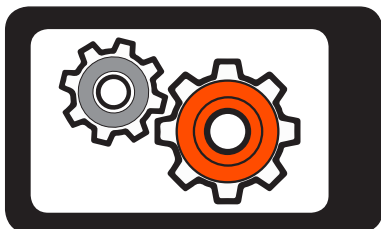

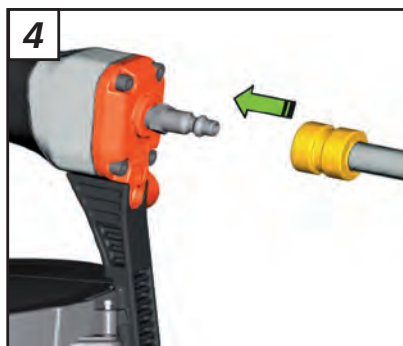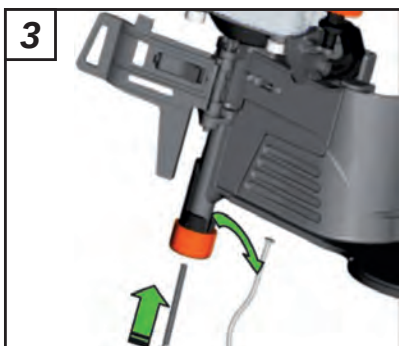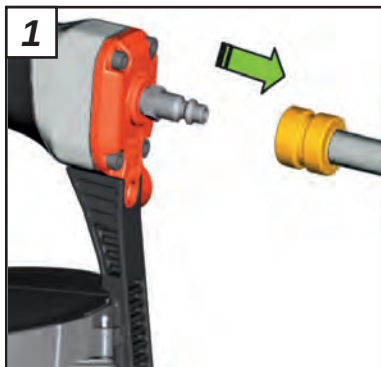

YY/WW....



YY= Year of manufacture
WW = Week of manufacture

**Resting position/ Ruheposition/ Position de repos/ Ruststand/
Posición de descanso/ Posizione di riposo/ Posição de des-
canso/ Pozycja spoczynku/ Klidová poloha/ Nyugalmi állapot/
Положение в нерабочем состоянии/ Θέση αδράνειας/ Hviles-
tilling/ Viloläge/ Hvileposisjon/ Lepoasento/ Položaj mirovanja/
Pokoiová poloha/ Položaj mirovanja/ وضع السكون / Ramybės
padėtis/ Ooteasend/ Miera stāvoklis/ Hvíldarstaða**





ITW CONSTRUCTION PRODUCTS EUROPE
Code 576672 (04/2019)
www.spitpaslode.com